






CONTENT

ABOUT US	4
01 SWEEPING MACHINES	
Sweeping machine BS	8
Sweeping machine BS H	9
Sweeping machine FOX	10
Sweeping machine FOX BH	11
Sweeping machine FOX LH	12
Sweeping machine FOX LH BH	13
Sweeping machine FOX LG	14
Sweeping machine FOX LG BH	15
Sweeping machine FOX H	16
Sweeping machine FOX H BH	17
Sweeping machine PG	18
Sweeping machine PG BH	19
Sweeping machine PG F	20
Sweeping machine PROFI	21
Sweeping machine PROFI L	22
Sweeping machine PROFI L BH	23
Sweeping machine PROFI G	24
Sweeping machine PROFI H	25
Sweeping machine PI	26
Sweeping machine PI BH	27
Sweeping machine SHARK	28
Sweeping machine SHARK H	29
Sweeping machine KS	30
Sweeping machine MK III	31
Sweeping machine PIW	32
Sweeping machine TK	33
Sweeping machine FKM/GKM BH	34
Excavator broom sweeper for lawns E	35
Lawn sweeper G	35
02 SNOWPLOWS	
Light class duty class SSV L	38
Light class duty class SSVL L	39
Semi-heavy duty class SSV M	40
Semi-heavy duty class SSVL M	41
Semi-heavy duty class SSV D	42
Heavy class SSV	43
Heavy class SSVL	44
Heavy class SSVL A with positive angled Hardox knife	45
Economical class SV	46
Economical class SVV	47
Economical class SVVH	48
Snow blower SBV	49
Snow clearing bucket MPB	49
03 GRADERS	
Grader RB PROFI	52
Tractor grader RB M	53
Side grader attachment SG	54
Rear grader attachment GG	55
Frontal grader attachment CG	56
Bulldozer GF	57
04 SAND SPREADERS	
Sand spreaders SP	60
Sand spreaders on wheels SP	61
Disc Sand spreader SPD – self load	62
05 ATTACHABLE IMPLEMENTS	
Front mounth bracket	66
Bucket K	66
Concrete mixing bucket CM	67
4in1 bucket	68
High capacity grain bucket KTG	68
Universal bucket KB M	69
Grain bucket KB	69
Bucket PLK	70
V shape bucket	70
Rehandling bucket KTR	71
Heavy construction bucket KTC	71
Lightweight materials bucket LMK	72
Grapple bucket KR	73
Grapple bucket KR D	73
Grapple bucket with sheet nails KRL	74
Pallet fork PS	75
Pallet fork with grapple PS L	75
Bale fork RS	76
Bale handler RR	76
Bale handler with hooks RR SD	77
Square bale grapple KRR	77
Transport boxes TB	78
Earth drill ED	79
Frame for big bags DR	79
06 SILAGE IMPLEMENTS	
Silage leveller SL	82
Silage leveller SK	83
Silage leveller ST	84
Silage fork FG	85
Silograb SR	86
Silograb with sheet nails SRL	87
Silo ripper SA	87
07 EXCAVATOR TOOLS	
Trench bucket KOK	90
Grading buckets LKR 5	90
Grading buckets LKR 8	91
Grading buckets LKR 10/LKR 18	91
Crowbars / Ice ripper RP	92
Diging bucket MGS	92
Root grapple KH	93
Asphalt cutter AL	93
08 OTHER	
Mulcher shredder MP	96
Mulcher shredder RCL	96
Bale wagon RP	97
09 FRONTLOADERS	
Front loader FL-200 S-2/P	100
Frontloader FL-280	101
Frontloader FL-360	101
Frontloader FL-380	102
Frontloader FL-400	102
TERMS	104

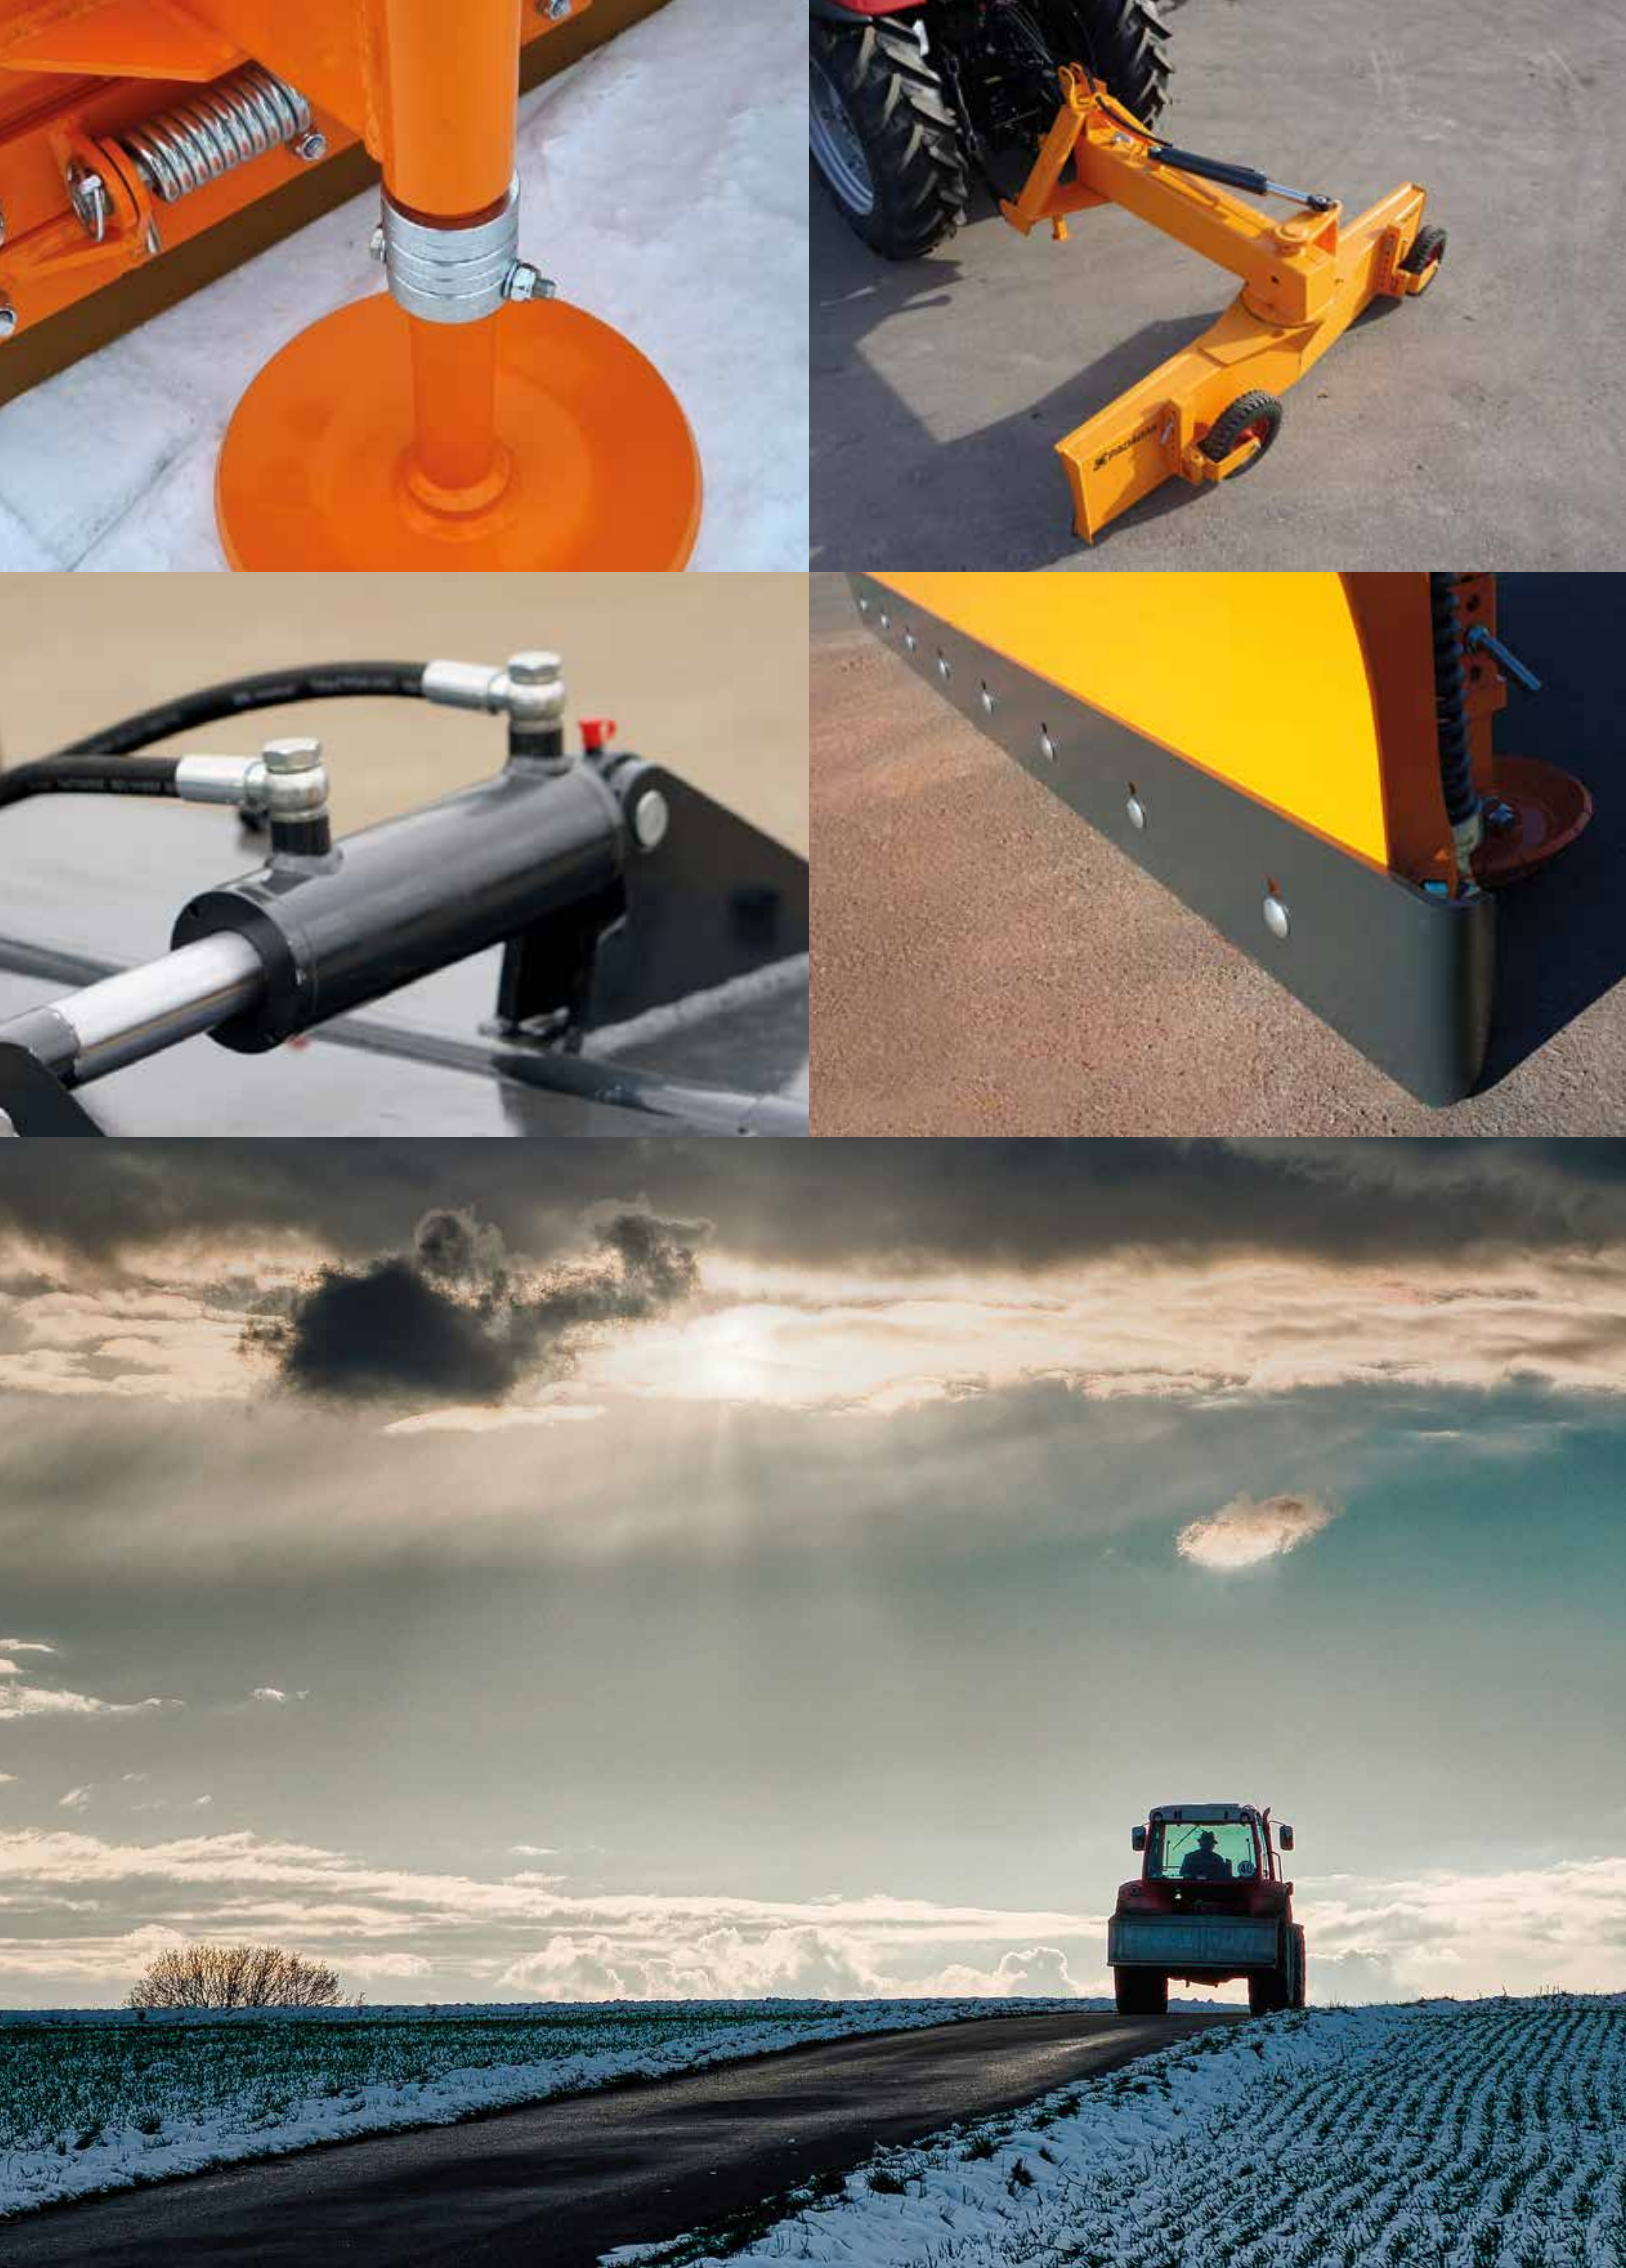

PROFESSIONALISM. QUALITY. DURABILITY.

UAB "V. Padagas ir Ko" is a Lithuanian capital, family-owned company, founded in 1995. The company started with producing various type of agricultural machinery, but over time our main activity became manufacture of implements for tractors, wheel loaders, telehandlers. For 30 years, we are successfully producing and selling implements for agriculture and utility sectors. Today the company is the market leader in the Baltic States specializing in the production of snow blades and sweepers.

We constantly designing new products and improving their quality. Our factory is modernized with new and advanced metal-working machinery, as well as a robotized welding station, sandblasting and painting chambers.

Today UAB "V. Padagas ir Ko" company is working with a welding robot MOTOMAN DX-100, CNC lathe, CNC milling machines. Also we are using non-programmed traditional metal processing machines, sandblasting and painting chambers.

Since the very beginning of the PADAGAS company the most important strategy is to have best production methods in advanced technology, equipment and tool use. This way we want to ensure the quality of products, reduce production costs and delivery times. Our main goal is to increase the value of the company, supplying the market with high quality products.

After mastering new, modern and conventional capabilities of the devices, a company produces high-quality products appreciated by German, Norwegian, Swedish and Finnish markets for utilities and agricultural sectors at a reasonable price.

UAB "V. Padagas ir Ko" the main customers and partners are utilities, agricultural, construction and forestry equipment sales representatives.

All manufactured products conform to the European Parliament and Council Directive 2006/42/EB on the safety of machinery and are CE marked.



UAB "V. Padagas ir Ko"
Pušies str. 20, Varkaliai,
LT-90104 Plungės distr., Lithuania
Tel. +370 448 71863
Fax +370 448 71891
info@padagas.lt
www.padagas.eu

ABOUT US



LEADER IN THE MARKET



30 YEARS OF EXPERIENCE



PROFESSIONAL TEAM



MODERN TECHNOLOGIES



HIGH PRODUCT QUALITY



CONTEMPORARY DESIGN

**MACHINERY FOR AGRICULTURE
AND UTILITY SECTORS**

SWEEPING MACHINES

Our sweeping machines can sweep, collect and pick up dirt and trash. Perfect for cleaning of parking spaces, sidewalks, loading docks and warehouses. Daily work will become efficient and easy.

POWERFUL
SWEEPERS



HIGH-QUALITY
PARTS



EASY
MAINTENANCE






Sweeping machine BS

		BS-130	BS-155	BS-185	BS-210	BS-230	BS-250
	Total width, mm	1523	1773	2073	2457	2657	2857
	Working width, mm	1297	1547	1847	2098	2298	2500
	Capacity of dust bunker, m³	0,37	0,44	0,52	0,59	0,65	0,71
	Working capacity of dust bunker, m³	0,26	0,31	0,37	0,41	0,46	0,50
	Weight, kg	372	445	493	534	565	596
	Brush ring diameter, mm	650					
	Hydraulic motor	1					
	Oil pressure min/ recommended/max, bar	125/150/175					
	Oil flow min/ recommended/max, l/min	40/50/75					

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Side brush
- Solenoid valve

Fits To:

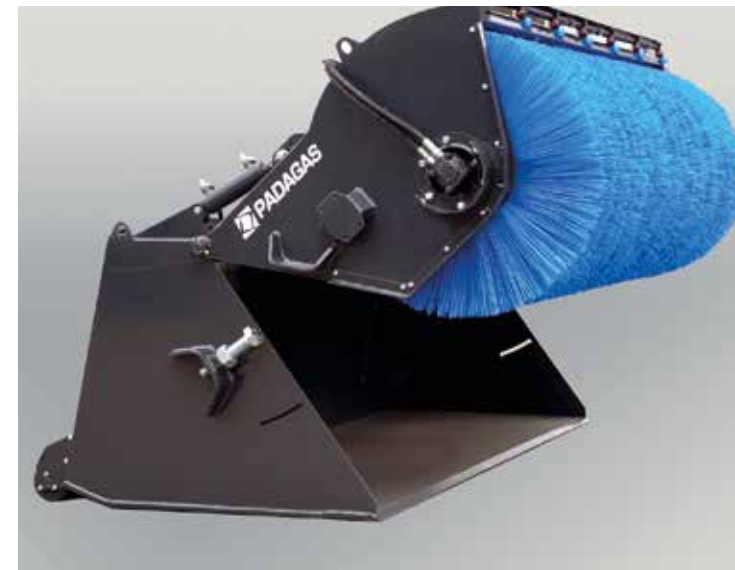

EXTRA BIG
BRUSH RING
915 mm

Sweeping machine BS H

		BS H-230	BS H-250	BS H-280	BS H-300
	Total width, mm	2657	2857	3157	3357
	Working width, mm	2303	2503	2803	3003
	Capacity of dust bunker, m³	1,32	1,44	1,61	1,72
	Working capacity of dust bunker, m³	0,93	1,01	1,13	1,21
	Weight, kg	858	899	962	1003
	Brush ring diameter, mm	915			
	Hydraulic motor	2			
	Oil pressure min/ recommended/max, bar	125/150/175			
	Oil flow min/ recommended/max, l/min	80/100/150			

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Side brush
- Solenoid valve

Fits To:






Sweeping machine FOX

		FOX-130	FOX-150	FOX-180	FOX-230
	Total width, mm	1584	1774	2084	2584
	Working width, mm	1253	1443	1753	2253
	Working width angled, mm	1170	1356	1647	2116
	Weight, kg	250	262	282	314
	PPN brush ring diameter, mm	520			
	Hydraulic turning left/right	20°			
	Oil pressure min/recommended/max, bar	120/140/175			
	Oil flow min/recommended/max, l/min	25/30/60			


- Optional:
- Water system with one water tank (200 l)
 - Side brush
 - Solenoid valve
 - Hydraulic angling
 - Safety cover

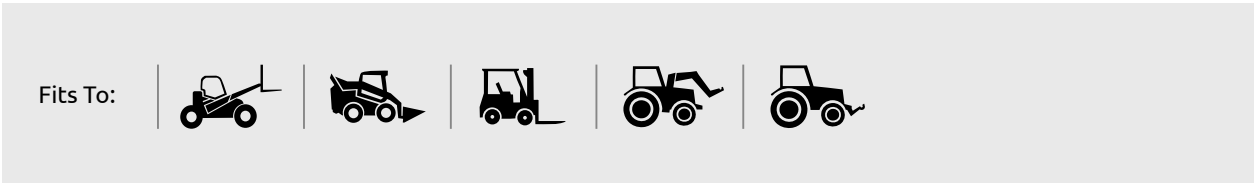

Sweeping machine FOX BH

		FOX-130BH	FOX-150BH	FOX-180BH	FOX-230BH
	Total width, mm	1584	1774	2084	2584
	Working width, mm	1253	1443	1753	2253
	Working width angled, mm	1170	1356	1647	2116
	Weight, kg	250	262	282	314
	Dirt collector capacity, m³	0,09	0,10	0,13	0,16
	PPN brush ring diameter, mm	520			
	Hydraulic turning left/right	20°			
	Oil pressure min/recommended/max, bar	120/140/175			
	Oil flow min/recommended/max, l/min	25/30/60			

- Optional:
- Water system with one water tank (200 l)
 - Side brush
 - Solenoid valve
 - Hydraulic angling

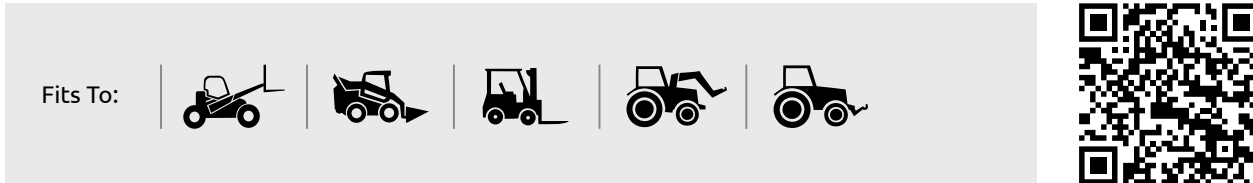



Sweeping machine FOX LH

		FOX LH-120	FOX LH-135	FOX LH-150
	Total width, mm	1431	1581	1731
	Working width, mm	1181	1331	1481
	Working width angled, mm	1110	1251	1392
	Weight, kg	175	184	193
	PPN brush ring diameter, mm	400		
	Hydraulic turning left/right	20°		
	Oil pressure min/ recommended/max, bar	120/140/175		
	Oil flow min/ recommended/max, l/min	20/25/30		

Optional:

- Side brush
- Solenoid valve
- Hydraulic angling
- Safety cover

Fits To:









Sweeping machine FOX LH BH

		FOX LH-120BH	FOX LH-135BH	FOX LH-150BH
	Total width, mm	1431	1581	1731
	Working width, mm	1181	1331	1481
	Working width angled, mm	1110	1251	1392
	Weight, kg	175	184	193
	Dirt collector capacity, m³	0,08	0,09	0,10
	PPN brush ring diameter, mm	400		
	Hydraulic turning left/right	20°		
	Oil pressure min/ recommended/max, bar	120/140/175		
	Oil flow min/ recommended/max, l/min	20/25/30		

Optional:


- Side brush
- Solenoid valve
- Hydraulic angling

Fits To:







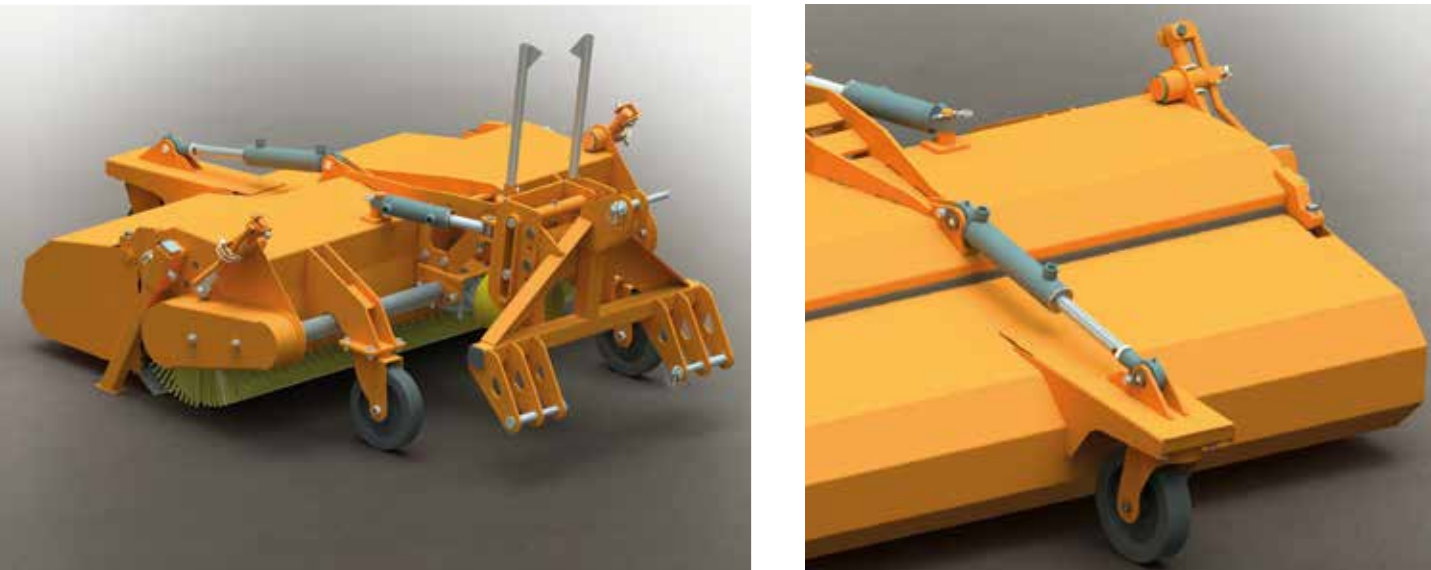

Sweeping machine FOX LG

		FOX LG-120	FOX LG-135	FOX LG-150
	Total width, mm	1431	1581	1731
	Working width, mm	1181	1331	1481
	Working width angled, mm	1110	1251	1392
	Weight, kg	192	201	211
	PPN brush ring diameter, mm	400		
	Hydraulic turning left/right	20°		

Optional:

- Side brush
- Solenoid valve
- Hydraulic angling
- Safety cover

Fits To:



Sweeping machine FOX LG BH

		FOX LG-120BH	FOX LG-135BH	FOX LG-150BH
	Total width, mm	1431	1581	1731
	Working width, mm	1181	1331	1481
	Working width angled, mm	1110	1251	1392
	Weight, kg	192	201	211
	Dirt collector capacity, m³	0,08	0,09	0,10
	PPN brush ring diameter, mm	400		
	Hydraulic turning left/right	20°		

Optional:

- Side brush
- Solenoid valve
- Hydraulic angling

Fits To:





Sweeping machine FOX H

		FOX H-150	FOX H-200	FOX H-230	FOX H-250
	Total width, mm	1753	2253	2563	2793
	Working width, mm	1428	1928	2238	2445
	Working width angled, mm	1342	1812	2103	2298
	Weight, kg	328	380	407	430
	PPN brush ring diameter, mm	600			
	Hydraulic turning left/right	20°			
	Oil pressure min/recommended/max, bar	120/140/175			
	Oil flow min/recommended/max, l/min	25/30/60	30/40/60	30/40/60	40/50/75

- Optional:
- Water system with one water tank (200 l)
 - Side brush
 - Solenoid valve
 - Hydraulic angling
 - Safety cover



Sweeping machine FOX H BH

		FOX H-150BH	FOX H-200BH	FOX H-230BH	FOX H-250BH
	Total width, mm	1753	2253	2563	2793
	Working width, mm	1428	1928	2238	2445
	Working width angled, mm	1342	1812	2103	2298
	Weight, kg	328	380	407	430
	Dirt collector capacity, m³	0,12	0,16	0,19	0,20
	PPN brush ring diameter, mm	600			
	Hydraulic turning left/right	20°			
	Oil pressure min/recommended/max, bar	120/140/175			
	Oil flow min/recommended/max, l/min	25/30/60	30/40/60	30/40/60	40/50/75

- Optional:
- Water system with one water tank (200 l)
 - Side brush
 - Solenoid valve
 - Hydraulic angling





PTO
DRIVEN
MOUNTED IN
THE BACK

Sweeping machine PG

		PG-15	PG-20	PG-22	PG-25	PG-30
	Total width, mm	1650	2150	2477	2650	3277
	Working width, mm	1394	1893	2200	2400	3000
	Working width angled, mm	1223	1655	1994	2090	2719
	Angling	25°				
	Weight, kg	270	300	317	335	417
	Brush ring diameter, mm	520				
	Drive	Drive Mechanical, from PTO shaft				

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Side brush
- Hydraulic lifting for side brush
- Water system for side brush
- Solenoid valve
- Hydraulic angling
- PTO shaft

Fits To:



PTO
DRIVEN
MOUNTED IN
THE BACK

Sweeping machine PG BH

		PG-15BH	PG-20BH	PG-25BH
	Total width, mm	1650	2150	2650
	Working width, mm	1394	1893	2400
	Working width angled, mm	1223	1655	2090
	Angling	25°		
	Weight, kg	380	430	475
	Capacity of dust bunker, m³	0,15	0,20	0,25
	Brush ring diameter, mm	520		
	Drive	Mechanical, from PTO shaft		

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Side brush
- Hydraulic lifting for side brush
- Water system for side brush
- Solenoid valve
- Hydraulic angling
- PTO shaft

Fits To:





PTO
DRIVEN
MOUNTED IN
THE FRONT

Sweeping machine PG F

		PG F-30
	Total width, mm	3315
	Working width, mm	3000
	Working width angled, mm	2720
	Angling	20°
	Weight, kg	940
	Brush ring diameter, mm	800
	PTO speed, rpm	1000
	Drive	Mechanical, from PTO shaft

Optional:

- Hydraulic angling

Fits To:



2in1
SWEEPING
MACHINES

Sweeping machine PROFI


		PROFI-1852	PROFI-2102	PROFI-2302	PROFI-2602	PROFI-2902
	Total width, mm	2370	2440	2640	2940	3240
	Working width, mm	2010	2080	2280	2580	2870
	Working width angled, mm	1600	1700	2000	2300	2500
	Angling	20°				
	Weight, kg	664	695	717	748	793
	Capacity of dust bunker, m³	0,36	0,37	0,41	0,46	0,21
	Brush ring diameter, mm	700				
	Hydraulic motor	1				2
	Oil pressure, bar	175				
	Oil flow, l/min	80				

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Side brush
- Hydraulic lifting for side brush
- Water system for side brush
- Solenoid valve, free rotation valve and safety valve
- Side lamps, 2 pcs
- Working area lightening
- Oil flow regulator: 150 l/min; 250 l/min; 340 l/min
- Free rotation valve, 1 pcs
- Hard rubber tires (set)

Fits To:



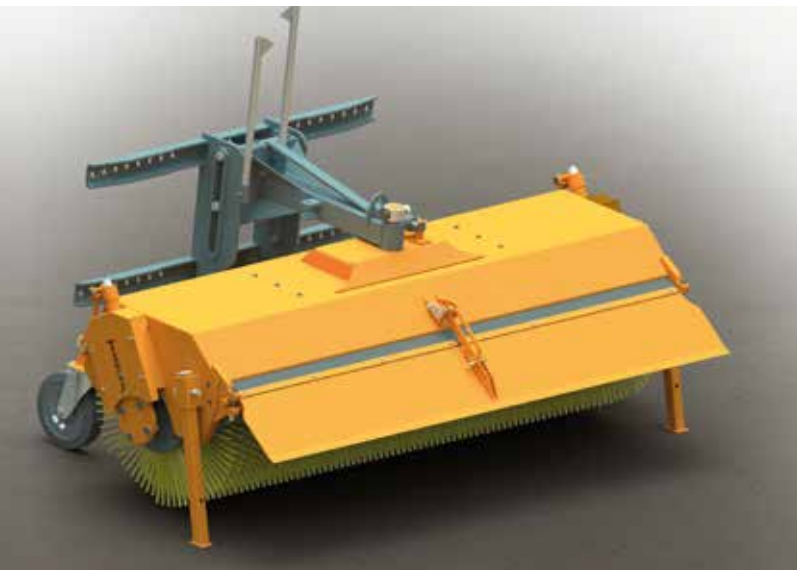

Sweeping machine PROFIL L

		PROFI L-1501	PROFI L-2001	PROFI L-2301	PROFI L-2501
	Total width, mm	1716	2216	2526	2716
	Working width, mm	1445	1945	2255	2450
	Working width angled, mm	1358	1828	2119	2302
	Angling	20°			
	Weight, kg	362	406	433	455
	Brush ring diameter, mm	600			
	Oil pressure min/ recommended/max, bar			120/140/175	125/150/175
	Oil flow min/ recommended/max, l/min			30/40/60	40/50/75

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Side brush
- Hydraulic lifting for side brush
- Water system for side brush
- Solenoid valve
- Side lamps, 2 pcs
- Working area lightening
- Oil flow regulator: 150 l/min; 250 l/min; 340 l/min
- Free rotation valve, 1 pcs
- Hard rubber tires (set)

Fits To:


2in1
 SWEEPING
 MACHINES

Sweeping machine PROFIL L BH

		PROFI L-150BH	PROFI L-200BH	PROFI L-230BH	PROFI L-250BH
	Total width, mm	1716	2216	2526	2716
	Working width, mm	1445	1945	2255	2450
	Working width angled, mm	1358	1828	2119	2302
	Angling	20°			
	Weight, kg	362	406	433	455
	Dirt collector capacity, m³	0,22	0,29	0,33	0,36
	Brush ring diameter, mm	650			
	Hydraulic motor	1			
	Oil pressure min/ recommended/max, bar	120/140/175			
	Oil flow min/ recommended/max, l/min	30/40/60			

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Side brush
- Hydraulic lifting for side brush
- Water system for side brush
- Solenoid valve
- Side lamps, 2 pcs
- Working area lightening
- Oil flow regulator: 150 l/min; 250 l/min; 340 l/min
- Free rotation valve, 1 pcs
- Hard rubber tires (set)

Fits To:





**EXTRA BIG
WATER SYSTEM
TANKS
2x400 l**

Sweeping machine PROFI G

		PROFI G-2650	PROFI G-2850	PROFI G-3050	PROFI G-3350	PROFI G-3650	PROFI G-3950
	Total width, mm	3000	3200	3400	3700	4000	4300
	Working width, mm	2650	2850	3050	3350	3650	3950
	Angling						20°
	Weight, kg	1231	1281	1331	1406	1481	1556
	Brush ring diameter, mm						915
	Hydraulic motor						2
	Oil pressure, bar						175
	Oil flow, l/min						150

Optional:

- Water system with one water tank (400 l)
- Additional water tank to water system (400 l)
- Side brush
- Hydraulic lifting for side brush
- Water system for side brush
- Solenoid valve
- Free rotation valve and safety valve (installed)
- Side lamps, 2 pcs
- Working area lightening
- Oil flow regulator: 150 l/min; 250 l/min; 340 l/min

Fits To:



**2in1
SWEEPING
MACHINES**

Sweeping machine PROFI H

		PROFI H-2101	PROFI H-2501	PROFI H-2801
	Total width, mm	2440	2840	3140
	Working width, mm	2080	2480	2780
	Working width angled, mm	1700	2100	2400
	Angling	20°		
	Weight, kg	937	989	1028
	Capacity of dust bunker, m³	0,49	0,58	0,65
	Brush ring diameter, mm	800		
	Hydraulic motor	2		
	Oil pressure, bar	175		
	Oil flow, l/min	80		

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Side brush
- Hydraulic lifting, water system for side brush
- Solenoid valve
- Free rotation valve and safety valve (installed)
- Side lamps, 2 pcs
- Working area lightening
- Oil flow regulator: 150 l/min; 250 l/min; 340 l/min
- Free rotation valve, 1 pcs
- Hard rubber tires (set)

Fits To:





Sweeping machine PI

		PI-16	PI-18	PI-21	PI-25	PI-29
	Total width, mm	1880	2080	2380	2780	3340
	Working width, mm	1570	1770	2270	2450	2860
	Working width angled, mm	1410	1600	1870	2335	2598
	Hydraulic angling	25°				
	Weight, kg	535	564	606	683	743
	Brush ring diameter, mm	600				
	Hydraulic motor	1				
	Oil pressure min/ recommended/max, bar	125/150/175				
	Oil flow min/ recommended/max, l/min	40/50/75				

Optional:

- Water system
- Side brush
- Hydraulic angling

Fits To:



Sweeping machine PI BH

		PI-16BH	PI-18BH	PI-21BH	PI-25BH	PI-29BH
	Total width, mm	1880	2080	2380	2780	3340
	Working width, mm	1570	1770	2270	2450	2860
	Working width angled, mm	1410	1600	1870	2335	2598
	Hydraulic angling	25°				
	Weight, kg	535	564	606	683	743
	Dirt collector capacity, m³	0,22	0,25	0,29	0,35	0,40
	Brush ring diameter, mm	600				
	Hydraulic motor	1				
	Oil pressure min/ recommended/max, bar	125/150/175				
	Oil flow min/ recommended/max, l/min	40/50/75				

Optional:

- Water system
- Side brush
- Hydraulic angling

Fits To:





Sweeping machine SHARK

		SHARK-250	SHARK-300	SHARK-330	SHARK-350
	Total width, mm	2858	3358	3658	3858
	Working width, mm	2460	2960	3260	3460
	Working width angled, mm	2230	2683	2955	3136
	Weight, kg	560	589	633	625
	Brush ring diameter, mm	800			
	Angling	25°			
	Hydraulic motor	2			
	Oil pressure min/ recommended/max, bar	125/150/175			
	Oil flow min/ recommended/max, l/min	80/100/150			

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Solenoid valve
- Side lamps, 2 pcs
- Working area lightening
- Oil flow regulator: 150 l/min; 250 l/min; 340 l/min
- Free rotation valve, 1 pcs (if sweeper has 2 motors, it needs 2 pcs Free rotation valves)
- Safety valve for hydraulic motor, 1 pcs (if sweeper has 2 motors, it needs 2 pcs free safety valves)
- Hard rubber tires (set)

Fits To:

EXTRA BIG
BRUSH RING
915 mm

Sweeping machine SHARK H

		SHARK H-250	SHARK H-300	SHARK H-330	SHARK H-350
	Total width, mm	2858	3358	3658	3858
	Working width, mm	2456	2956	3256	3456
	Working width angled, mm	2230	2683	2955	3136
	Weight, kg	592	632	650	665
	Brush ring diameter, mm	915			
	Angling	25°			
	Hydraulic motor	2			
	Oil pressure min/ recommended/max, bar	125/150/175			
	Oil flow min/ recommended/max, l/min	80/100/150			

Optional:

- Water system with one water tank (200 l)
- Additional water tank to water system (200 l)
- Solenoid valve
- Side lamps, 2 pcs
- Working area lightening
- Oil flow regulator: 150 l/min; 250 l/min; 340 l/min
- Free rotation valve, 1 pcs (if sweeper has 2 motors, it needs 2 pcs free rotation valves)
- Safety valve for hydraulic motor, 1 pcs (if sweeper has 2 motors, it needs 2 pcs free safety valves)
- Hard rubber tires (set)

Fits To:





Sweeping machine KS

		KS-230	KS-250
↔	Total width, mm	2583	2733
↔	Working width, mm	2156	2306
kg	Weight, kg	340	360
↔	Brush ring diameter, mm	600	
⬇️	Oil pressure min/ recommended/max, bar	125/150/175	
⬇️	Oil flow min/ recommended/max, l/min	40/50/75	



11 ROWS
OF BRISTLES

Sweeping machine MK III

		MK III-150	MK III-180	MK III-220	MK III-245	MK III-300
↔	Total width, mm	1540	1840	2240	2490	3040
↔	Working width, mm	1500	1800	2200	2450	3000
kg	Weight, kg	134	159	192	213	265

Optional:

- Forklift bracket
- Multibracket frame
- Side brushes





**SWEeper
FOR
EXCAVATOR**

Sweeping machine PIW

		PIW-30	PIW-60	PIW-80	PIW-120	PIW-150	PIW-200	PIW-250
	Total width, mm	470	950	1150	1550	1809	2367	2867
	Working width, mm	300	600	800	1200	1440	2000	2500
	Weight, kg	105	155	170	200	230	285	320
	Brush ring diameter, mm	800						
	Hydraulic motor						1	2
	Oil pressure min/ recommended/max, bar	125/150/175						
	Oil flow min/ recommended/max, l/min						40/50/75	80/100/150

Optional:

- S-40 bracket
- S-45 bracket
- S-60 bracket
- Lannen LE bracket
- NTP-10 bracket
- 915 mm extra big brush ring

Fits To:



Sweeping machine TK

		TK-130TK-150TK-180		
	Total width, mm	1700	1840	2140
	Working width, mm	1380	1500	1800
	Working width angled, mm	1320	1435	1720
	Weight, kg	191	198	212
	Brush ring diameter, mm	600		
	Angling	17°		
	Hydraulic motor	2		
	Oil pressure min/ recommended/max, bar	120/140/175		
	Oil flow min/ recommended/max, l/min	25/30/60		

Optional:

- Hydraulic angling

Fits To:





Sweeping machine FKM/GKM BH

		FKM/GKM-130BH	FKM/GKM-150BH	FKM/GKM-180BH	FKM/GKM-230BH
	Total width, mm	1600	1800	2100	2600
	Working width, mm	1300	1500	1800	2300
	Angling	25°			
	Weight, kg	186	200	220	250
	Brush ring diameter, mm	520			
	Drive	1 Oil motor			
	Oil pressure min/ recommended/max, bar	120/140/175			
	Oil flow min/ recommended/max, l/min	25/30/60			


Optional:

- Water system with one water tank (200 l)
- 3 point bracket (front or back mounted)
- Triangle bracket (front or back mounted)

Fits To:



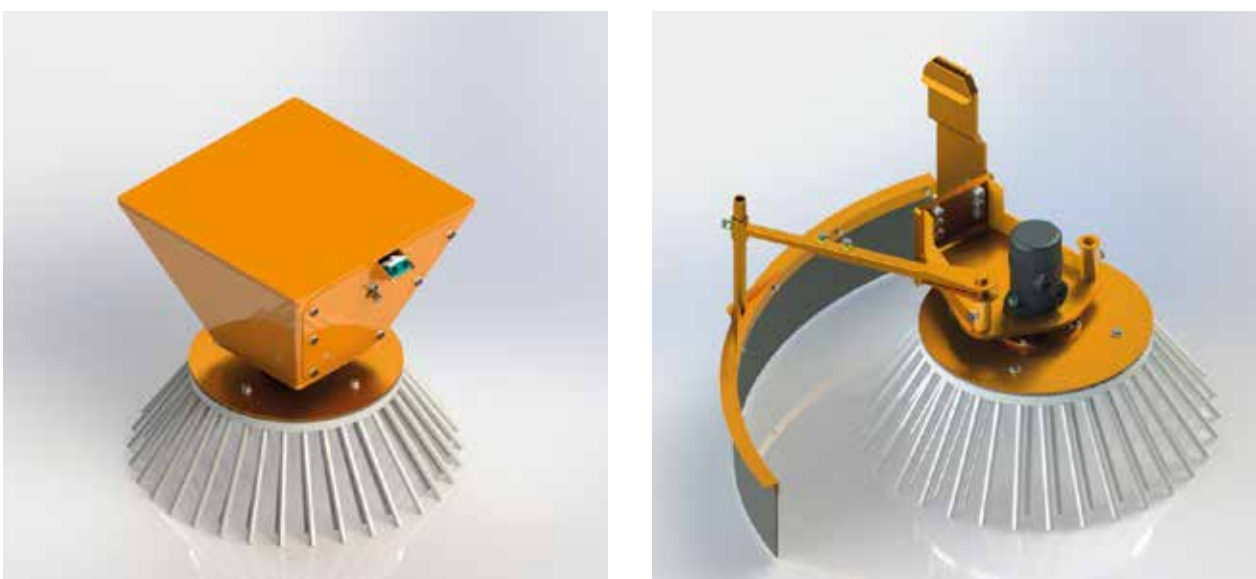

Excavator broom sweeper for lawns E

		E-70
	Brackets	S-40; S-45; S-60; NTP-10
	Height, m*	0,66
	Brushes	Metal / Plastic
	Drive	Hydraulic motor
	Required flow, L/min	25
	Weight, kg*	75

* Settings are approximate and can differ from the real data received.

Fits To:





Lawn sweeper G

		G-70
	Brackets	HXF 2302 mechanical
	Height, m*	0,66
	Brushes	Metal/ Plastic
	Drive	Oil motor
	Required flow, L/min	25
	Weight, kg*	46

* Settings are approximate and can differ from the real data received.

Fits To:






SNOWPLOWS

Our snowplows are used for removing snow and ice from outdoor surfaces, typically those serving transportation purposes. It would be difficult to get through the snowy winter without their help. Suitable for various tractors.

HYDRAULIC
CONTROL



VARIABLE
POSITIONS



HIGH-QUALITY
PARTS






Light duty class SSV L

		SSV-15L	SSV-17L	SSV-21L	SSV-25L
↔	Working width, mm	1490	1685	2111	2565
↙↘	Working width turning, mm	1350	1519	1903	2310
↻	Hydraulic rotation	25°			
↕	Height, mm	616	616	616	674
🔪	Cleaning knife	Hardox			
⚖️	Weight without bracket, kg	216	228	265	345

- Optional:
- Hydraulic turning
 - Side lamps
 - Cleaning knife – rubber

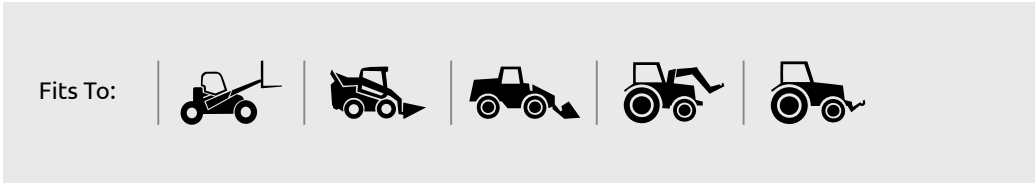

5
WORKING
POSITIONS

Light duty class SSVL L

		SSVL-15L	SSVL-17L	SSVL-21L	SSVL-25L	SSVL-28L
↔	Working width, mm	1500	1700	2120	2580	2890
↙↘	Working width turning, mm	1225	1412	1760	2132	2370
Ⓨ	Working width in position Y, mm	1274	1453	1802	2173	2430
Ⓥ	Working width in position V, mm	1198	1372	1719	2093	2350
↻	Hydraulic rotation	35°				
↕	Height middle/side, mm	678/730	678/730	677/760	677/760	677/760
🔪	Cleaning knife	Hardox				
⚖️	Weight without bracket, kg	250	265	305	340	390

- Optional:
- Hydraulic turning
 - Side lamps
 - Cleaning knife – rubber
 - Hydro system optimum efficiency
 - Solenoid valve





Semi-heavy duty class SSV M

		SSV-25M	SSV-28M	SSV-32M
↔	Working width, mm	2565	2800	3200
↖ ↗	Working width turning, mm	2100	2430	2750
↻	Hydraulic rotation	35°		
↕	Height, mm	678	678	678
🔪	Cleaning knife	Hardox		
⚖️	Weight without bracket, kg	600	625	660

Optional:

- Side lamps
- Cleaning knife – hard rubber
- Solenoid valve
- Support wheels
- Diagonal valve
- Hydro accumulator

Fits To:



5
WORKING
POSITIONS

Semi-heavy duty class SSVL M

		SSVL-25M	SSVL-28M	SSVL-32M
↔	Working width, mm	2572	2886	3286
↖ ↗	Working width turning, mm	2110	2360	2690
Ⓚ	Working width in position Y, mm	2168	2425	2753
Ⓥ	Working width in position V, mm	2090	2348	2676
↻	Hydraulic rotation	35°		
↕	Height middle/side, mm	779/854	779/854	779/854
🔪	Cleaning knife	Hardox		
⚖️	Weight without bracket, kg	630	670	700

Optional:

- Side lamps
- Cleaning knife – hard rubber
- Solenoid valve
- Support wheels
- Diagonal valve
- Hydro accumulator

Fits To:





Semi-heavy duty class SSV D

		SSV-26D	SSV-30D
↔	Working width, mm	2600	3000
↖↗	Working width turning, mm	2260	2600
↻	Hydraulic rotation	30°	
⌒	Bracket hydraulic rotation	7°	
⚖	Weight, kg	660	700


- Optional:
- Side lamps
 - Cleaning knife – hard rubber
 - Solenoid valve
 - Support wheels
 - Diagonal valve
 - Hydro accumulator



Heavy class SSV

		SSV-32	SSV-37	SSV-40
↔	Working width, mm	3277	3675	3951
↖↗	Working width turning, mm	2680	3010	3240
↻	Hydraulic rotation	35°		
↕	Height, mm	1058	1058	1058
🔪	Cleaning knife	Hardox		
⚖	Weight without bracket, kg	900	945	970

- Optional:
- Side lamps
 - Cleaning knife – hard rubber
 - Hydro system optimum efficiency
 - Support wheels
 - Diagonal valve
 - Hydro accumulator
 - Shock absorber for floating bracket

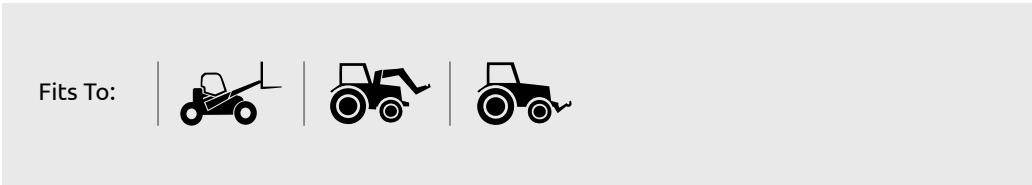

5
WORKING
POSITIONS

Heavy class SSVL

		SSVL-32	SSVL-37	SSVL-40
↔	Working width, mm	3296	3694	3970
↖ ↗	Working width turning, mm	2700	3030	3250
Ⓨ	Working width in position Y, mm	2758	3084	3310
Ⓥ	Working width in position V, mm	2687	3013	3239
↻	Hydraulic rotation	35°		
↕	Height middle/side, mm	1060	1057	1057
🔪	Cleaning knife	Hardox		
⚖️	Weight without bracket, kg	1065	1115	1155

Optional:

- Side lamps
- Cleaning knife – hard rubber
- Hydro system optimum efficiency
- Support wheels
- Diagonal valve
- Hydro accumulator
- Shock absorber for floating bracket

Fits To:   5
WORKING
POSITIONSHeavy class SSVL A
with positive angled Hardox knife

		SSVL-32A	SSVL-37A	SSVL-40A
↔	Working width, mm	3240	3740	4040
↖ ↗	Working width turning, mm	2700	3080	3320
Ⓨ	Working width in position Y, mm	2750	3130	3380
Ⓥ	Working width in position V, mm	2680	3060	3310
↻	Hydraulic rotation	35°		
↕	Height middle/side, mm	1205	1205	1205
🔪	Cleaning knife	Hardox		
🔪	Cleaning knife angle	25°		
⚖️	Weight without bracket, kg	1040	1090	1140

Optional:

- Side lamps
- Cleaning knife – hard rubber
- Hydro system optimum efficiency
- Support wheels
- Diagonal valve
- Hydro accumulator
- Protection valve
- Shock absorber for floating bracket

Fits To:   




Economical class SV

		SV-26	SV-30
↔	Working width, mm	2600	3120
↖↗	Working width turning, mm	2260	2700
↻	Hydraulic rotation	35°	
↕	Height, mm	620	620
🔪	Cleaning knife	Metal	
⚖️	Weight without bracket, kg	300	340

Optional:

- Hydraulic turning
- Cleaning knife – rubber

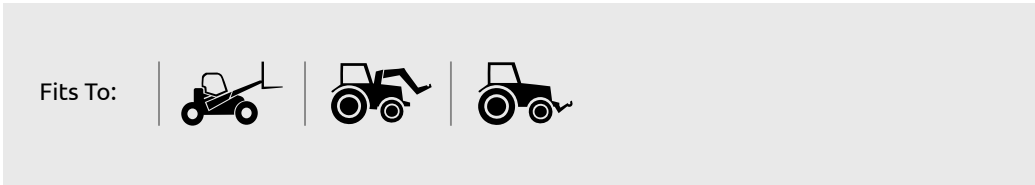



Economical class SVV

		SVV-2000	SVV-2500
↔	Working width, mm	2000	2500
↖↗	Working width turning, mm	1784	2165
↕	Height, mm	559	559
🔪	Cleaning knife	Hardox	
⚖️	Weight without bracket, kg	120	135

Optional:

- Rubber knife
- Euro bracket
- Cleaning knife – rubber

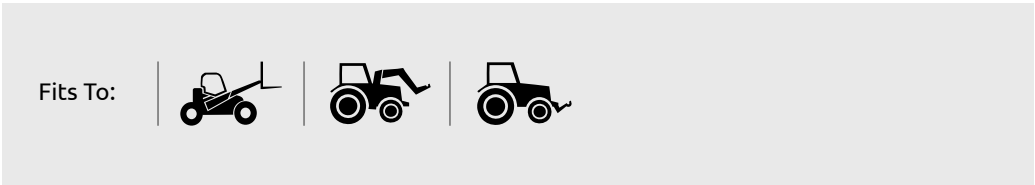

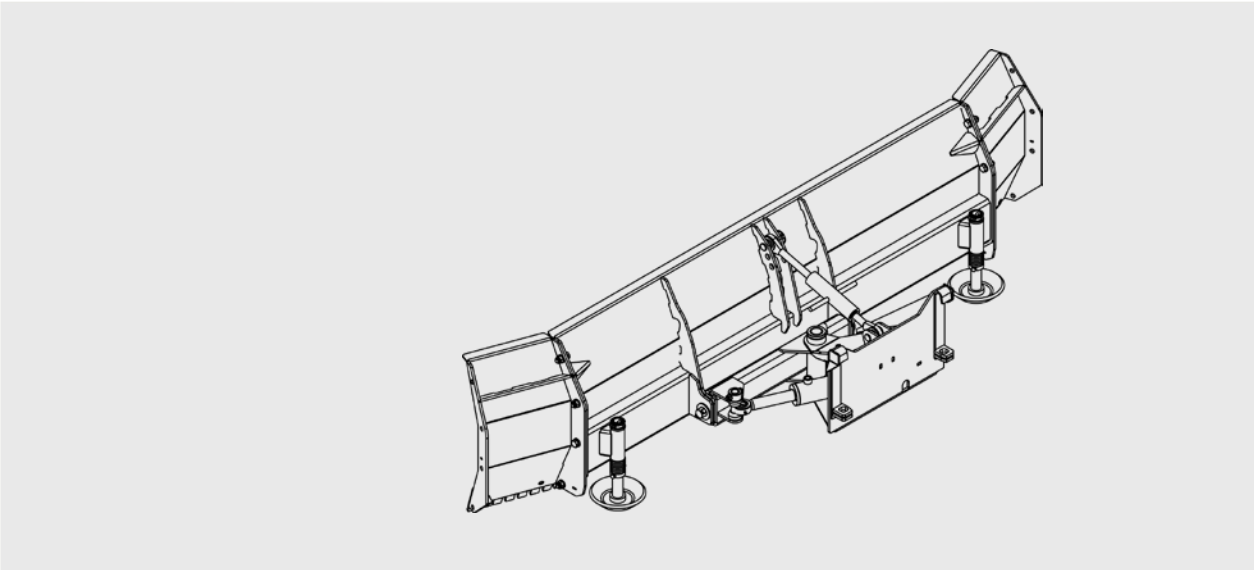


Economical class SVVH

		SVVH-2000	SVVH-2500
↔	Working width, mm	2000	2500
↖ ↗	Working width turning, mm	1784	2165
↻	Hydraulic rotation	30°	
↕	Height, mm	559	559
🔪	Cleaning knife	Hardox	
⚖️	Weight without bracket, kg	130	145

- Optional:
- Rubber knife
 - Euro bracket
 - Cleaning knife – rubber

Fits To:

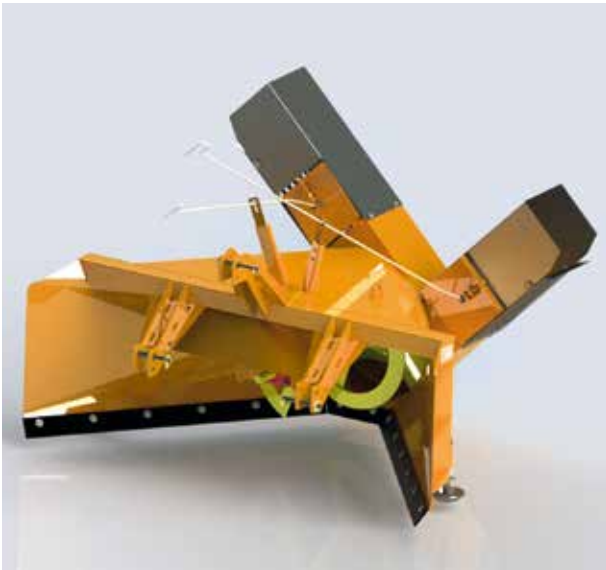

Snow blower SBV

		SBV-2250
↔	Working width, mm	2250
🔪	Snow throw knives, pcs.	4
🌀	Snow presenting shaft type	Spiral
⌀	Snow throw blade diameter, mm	700
⚡	Required tractor power, HP	45 ... 110
🕒	Tractor PTO speed, rpm/min	540
	Slice type and quantity	1 ¾ (6)
⚖️	Weight, kg	430

- Optional:
- Side knife

Fits To:



Snow clearing bucket MPB

		MPB-850
↔	Width, mm	1670
↔↔	Total width, mm	1800
↕	Height, mm	900
🪣	Capacity, m³	0,85
↓	Depth, mm	1112
⚖️	Weight, kg	500

GRADERS

Graders are commonly used in the construction and maintenance of dirt and gravel roads. In constructing paved roads, they prepare a wide flat base course for the final road surface. Our graders are also used to set native soil or gravel foundation pads to finish grade before the construction of large buildings.

LARGE
TURNING
ANGLE



EFFECTIVE
WORK



EASY TO
TRANSPORT





Grader RB PROFI

		RB PROFI
	Suspension system	3P cat. II-III
	Recommend power, hp	100
	Width, mm	2275
	Shellboard's rotation	275°
	Height, mm	1460
	Cleaning knife, pcs	5
	Weight without wheels, kg	880
	Wheels weight, kg	120

Optional:

- Extension wing 238 mm, 2 pcs
 - Extension wing 363 mm, 2 pcs
 - Extension angled wing 45°, 238 mm, 2 pcs
 - Extension angled wing 45°, 363 mm, 2 pcs
 - Hydraulic adjustment of wheels
 - Safety valve
- Hydraulic lock for hydraulic cylinder
 - Hydraulic accumulator
 - Electromagnetic valve (solenoid) for one pair of hydraulic connection
 - Solenoid valve

Fits To:







Tractor grader RB M

		RB M-250	RB M-2750	RB M-300
	Suspension system	3P cat. II		
	Recommend power, hp	< 100		
	Width, mm	2500	2750	3000
	Shellboard's rotation	252°		
	Height, mm	550	650	650
	Cleaning knife, pcs	2	3	4
	Weight, kg	470	526	562

Fits To:







Side grader attachment SG

	SG-250
← → Utmost working width from flank line of vehicle, mm	2200
↕ Dimensions of the plow, mm	3000x500x1110
↑ ↓ Plow's ascending height from the surface (for transportation), mm	550
⦿ Adjustment of working width	5° ÷ 45°
⚖ Weight, kg	1250



Fits To:



Rear grader attachment GG

	GG-320
← → Working width of rear extended plow (not including raker), mm	2200
↕ Plow dimensions:	
Left side	3180
Right side	1525
Raker	1159
↑ ↓ Height of the plow from the ground (during transportation), mm	400
⦿ Adjustment of working angle	0° ÷ 30°
⚖ Weight, kg	1309



Fits To:






Frontal grader attachment CG

	CG-300
↔ Width, mm	3000
↕ Plow dimensions, mm	3000x900x1500
↑ Descending plow below horizontal position, mm	150
↻ Angling to both sides	30°
⚖ Weight, kg	1500



Fits To:

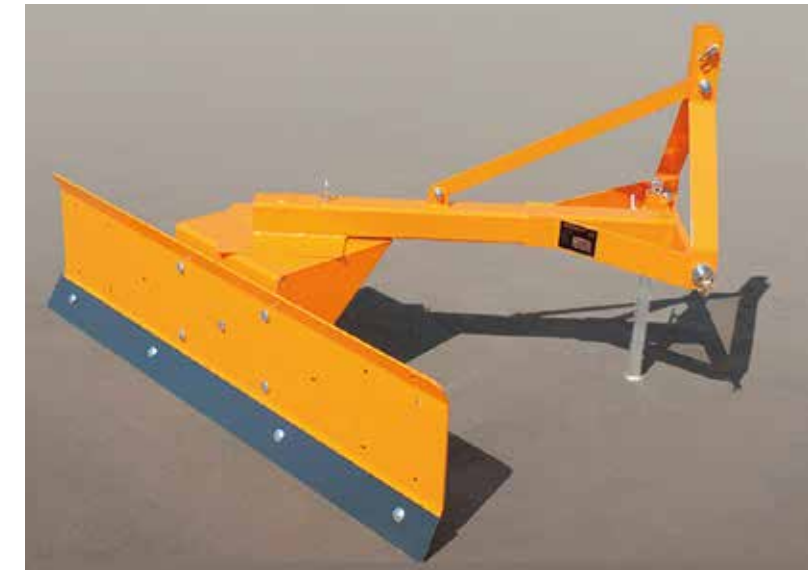

Bulldozer GF

	GF-150
⚡ Recommend power, hp	< 50
↔ Width, mm	1500
↻ Shellboard's rotation	360°
↑↓ Height, mm	400
🔪 Amount of knives, pcs	1
⚖ Weight, kg	83



Fits To:



SAND SPREADERS

A sand spreaders can spread anything from sand, salt, grass, seed, fertilizer, and lime. This is an equipment that is specifically designed to assist in the removal of snow. Keep your property safe and stay operating during the winter months.

BIG
CAPACITY



LARGE
SPREADING
WIDTH



OPTIMAL
EFFICIENCY





Sand spreader SP

		SP-240	SP-250	SP-400	SP-800	SP-1000	SP-1500	SP-2000	SP-3000
↔	Length, mm	1391	1420	1600	1800	2400	2600	2570	2570
↔	Width, mm	540	800	900	1160	1160	1210	1200	1600
↑ ↓	Height, mm	753	608	780	880	880	1015	1200	1200
↙ ↘	Working width, mm	1209	1200	1400	1580	2180	2360	2360	2360
⌒	Capacity, l	240	250	400	800	1000	1500	2000	3000
kg	Weight, kg	195	180	250	330	435	620	750	810
⚙️	Drive	Mechanic			Hydraulic				
⚙️	Recommended oil flow l/min								40

Optional:

- Three point bracket with hydraulic cylinder
- Bracket for front loader

Fits To:



9 m³
VOLUME



Sand spreader on wheels SP

		SP-4000	SP-6000	SP-8000	SP-9000
↔	Total width, mm	2574	2574	2574	2574
↕	Spreading width, mm	2238	2238	2238	2238
⌒	Container volume, m ³	4,4	6,4	8	9
↙ ↘	Total length, mm	3783	3783	3783	3783
↑ ↓	Height, mm	1875	2239	2498	2689
kg	Empty weight, kg	2200	2350	2440	2480
kg	Full weight, kg	13000			
⚙️	Recommended oil flow 160 bar, l	60			

Fits To:





Disc Sand spreader
SPD – self load

		SPD-1000
↔	Total width, mm	2420
↕	Spreading width, mm	100-1000
⌒	Container volume, m³	1
↔	Total length, mm	1250
↑ ↓	Height, mm	1110
⚖	Empty weight, kg	620
🛢	Recommended oil flow 160 bar, l	60

Optional:

- Smart control
- Tarpaulin cover

Fits To:



ATTACHABLE IMPLEMENTS

Attachable implements, are tools you can add to machinery to complete various tasks.

Different implements serve different purposes. These implements make it easier to scale earth, dig, move large objects and more.

VARIOUS
FUNCTIONS



WIDE
ASSORTMENT



EASY
MAINTENANCE





Arma Trac 804
Deutz Fahr Agrotrac 150
E-0
E-2
Europard-Foton 904
Ferguson 3080
John Deer 6300/6930/7810
Leus LS plus 90-100/U50
NEW Holland TD.90/T5060/TD5050
MTZ 1221/1523.3
Zetor
Solis 26
Farmtrac 26
TYM T954/T1003
Valtra N104H/T190
Zuitberg 10kN/8kN

Front mounth bracket

We are producing front mount bracket for various models of tractors.

Fits To:





Bucket K

		K-120
↔	Width, mm	1200
kg	Weight, kg	58
⌒	Capacity, m³	0,16



Fits To:





Concrete mixing bucket CM

		CM-150	CM-175	CM-200
↔	Total width, mm	1730	1980	2230
⌒	Capacity, l	750	850	950
↕	Weight, kg	760	830	900
⌚	Minimum suggested rotation, rpm	30		
⚙️	Flow rate, l/min	120		
⬇️	Max working pressure, bar	200		

Fits To:





4in1 bucket

		KH-130
↔	Width, mm	1300
kg	Weight, kg	99
∩	Capacity, m ³	0,16



Fits To:



High capacity grain bucket KTG

		KTG-250	KTG-300
↔	Width, mm	2440	2560
↑ ↓	Height, mm	1350	1280
↓	Depth, mm	1570	1810
kg	Weight, kg	690	855
∩	Capacity, m ³	2,5	3,0




Fits To:



Universal bucket KB M

		KB-150M	KB-200M	KB-230M	KB-550M
↔	Width, mm	1500	2000	2300	2500
↑ ↓	Height, mm	630			
↓	Depth, mm	870			
kg	Weight, kg	170	220	245	300
∩	Capacity, m ³	0,33	0,45	0,53	0,64

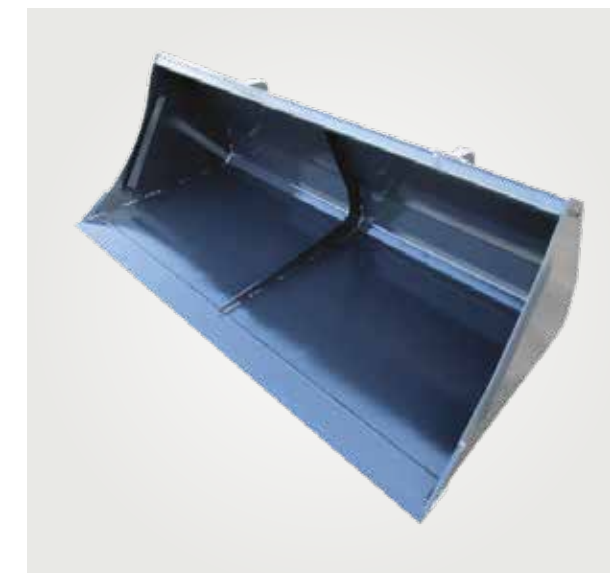


Fits To:



Grain bucket KB

		KB-150	KB-200	KB-230
↔	Width, mm	1530	2000	2300
↑ ↓	Height, mm	800		
↓	Depth, mm	1090		
kg	Weight, kg	225	285	315
∩	Capacity, m ³	0,81	1,05	1,20

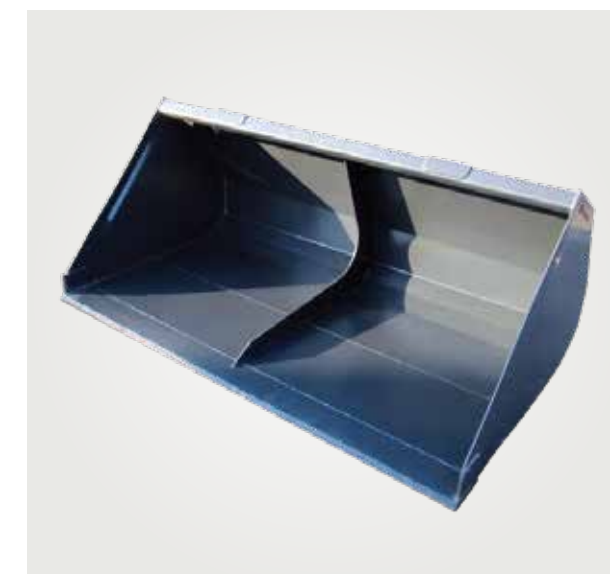

Fits To:



Bucket PLK

		PLK-2500
← →	Width, mm	2450
↑ ↓	Height, mm	1305
⇩	Depth, mm	1350
kg	Weight, kg	525
∩	Capacity, m ³	2,5



Fits To:



V shape bucket

		V200.100.90
← →	Width (top), mm	1992
← →	Width (bottom), mm	333
↑ ↓	Height, mm	1054
⇩	Depth, mm	930
kg	Weight, kg	602
∩	Capacity, m ³	0,8
t	Recommended for excavators, t	13-18



Fits To:



Rehandling bucket KTR

		KTR-150	KTR-200	KTR-250	KTR-300
← →	Width, mm	2350	2440	2440	2550
↑ ↓	Height, mm	900	1120	1350	1400
⇩	Depth, mm	1270	1520	1640	1820
kg	Weight, kg	420	500	586	660
∩	Capacity, m ³	1,5	2,0	2,5	3,0



Fits To:



Heavy construction bucket KTC

		KTC-110
← →	Width, mm	2320
↑ ↓	Height, mm	780
⇩	Depth, mm	1100
kg	Weight, kg	422
∩	Capacity, m ³	1,1



Fits To:





Lightweight materials bucket LMK

		LMK-280	LMK-300	LMK-400	LMK-550	LMK-700
← →	Width, mm	2400	2600	2700	2850	3150
↑ ↓	Height, mm	1340	1350	1480	1740	1900
⇅	Depth, mm	1350	1380	1580	1820	1980
kg	Weight, kg	633	680	852	1152	1552
∪	Capacity, m ³	2,8	3,0	4,0	5,5	7,0

Fits To:



Grapple bucket KR

		KR-150	KR-170	KR-200	KR-230
← →	Width, mm	1500	1700	2000	2300
↑ ↓	Height, mm	830			
⇅	Depth, mm	1090			
kg	Weight, kg	365	405	440	475
∪	Capacity, m ³	0,65	0,78	1,04	1,17




Fits To:




Grapple bucket KR D

		KR-150D	KR-170D	KR-200D	KR-230D
← →	Width, mm	1500	1700	2000	2300
↑ ↓	Height, mm	1140			
⇅	Depth, mm	1170			
kg	Weight, kg	450	490	550	600
∪	Capacity, m ³	0,80	0,95	1,05	1,25

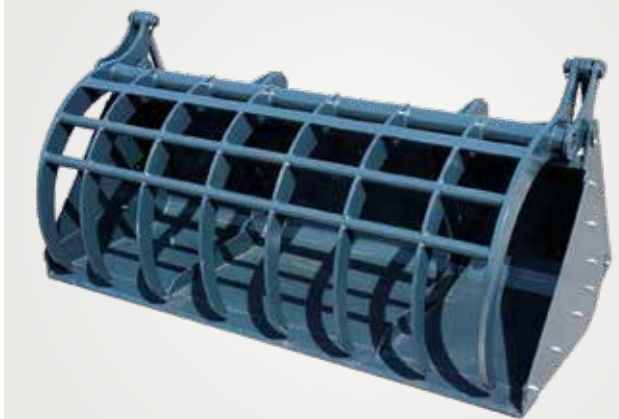

Fits To:



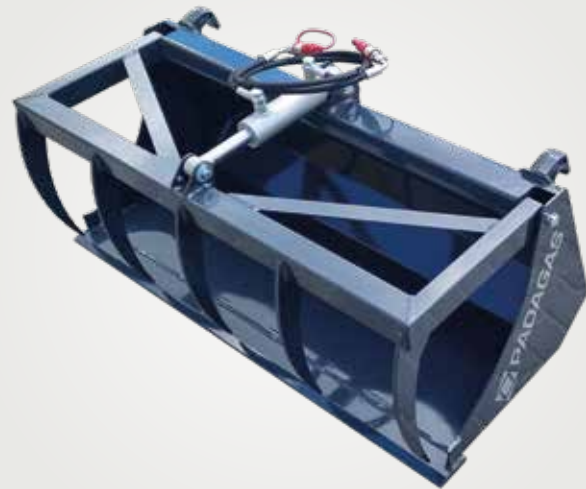

Grapple bucket with sheet nails KRL

		KRL-118	KRL-130	KRL-150	KRL-200
← →	Width, mm	1180	2600	2750	2850
↑ ↓	Height, mm	830			
↓	Depth, mm	1090			
kg	Weight, kg	74	315	400	435
∪	Capacity, m ³	0,18	0,36	0,65	1,04

Fits To:



Pallet fork PS

		PS-95	PS-100
← →	Fork length, mm	1000	1200
↑	Lifting power, kg	400	1600
kg	Weight, kg	71	188



Pallet fork with grapple PS L

		PS-100L
← →	Fork length, mm	1160
↑ ↓	Max height, mm	1200
↑	Lifting power, kg	1600
kg	Weight (without forks), kg	142



Fits To:





Bale fork RS

		RS-95
← →	Spike lenght, mm	1200
⬆	Lifting power, kg	400
⚖	Weight, kg	68

Fits To:



Bale handler RR

		RR-180
○	Bale size, mm	1200-1800
⚖	Weight, kg	250

Fits To:



Bale handler with hooks RR SD

		RR-150SD
○	Bale size, mm	650-1500
⚖	Weight, kg	150

Fits To:



Square bale grapple KRR

		KRR 755-2100
○	Min. bale width, mm	742
○	Max. bale width, mm	2102
⬆	Lifting power, kg	1500
⊙	Load center of gravity, mm	495
⌢	Gripper depth, mm	1082
↑ ↓	Height, mm	1198
⚖	Weight, kg	425

Fits To:





Transport boxes TB

		TB-100	TB-125	TB-150
↔	Width, mm	1000	1250	1500
↻	Emptying	Mechanical		
↻	Angled while emptying	45°		
kg	Weight, kg	63	70	77
∪	Capacity, m³	0,24	0,30	0,36

Fits To:



Earth drill ED

		ED-300 (non rotatable)	ED-300H (rotatable)
↓	Drilling depth, mm	1000	1000
∅	Drilling diameter, mm	According to the selected auger	
↔	Angling	–	Hydraulic
⚙	Drive	Mechanical	
kg	Weight, kg	200	

Optional augers:

- 120 mm
- 200 mm
- 300 mm
- 450 mm

Fits To:



Frame for big bags DR

		DR-100
↑↓	Height, mm	1833
↑	Lifting power, kg	800-1000
kg	Weight, kg	95



Fits To:



SILAGE IMPLEMENTS

We offer
a high-quality
silage levelers,
forks, silograbs and
silorippers.

This equipment is
designed for quick and
convenient preparation
of cattle feed – silage.

FASTER WORK
PROCESS



FUNCTIONAL
DESIGN



HIGH-QUALITY
PARTS






Silage leveller SL

		SL-450	SL-500
	Transportation width, mm	3000	3000
	Working width, mm	4500	5000
	Shield height, mm	1150	1150
	Weight, kg	815	865

Optional:

- Rise (grilles, 40 cm)
- Side lamps
- Lightening

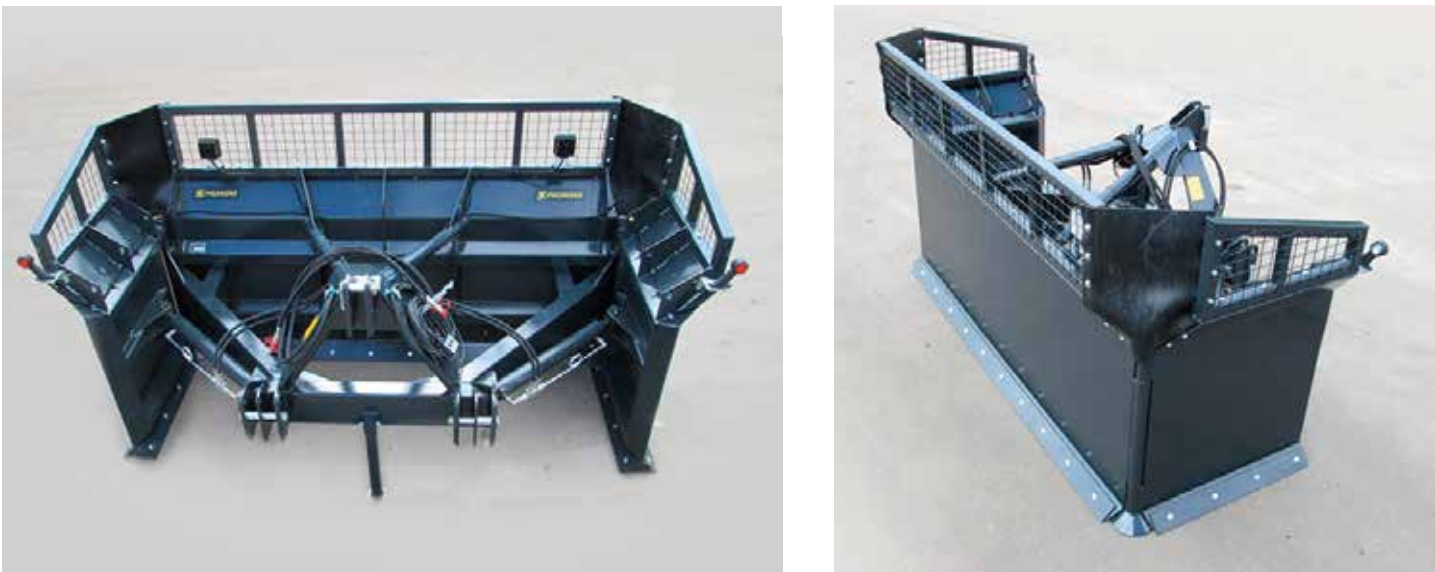

Silage leveller SK

		SK-400	SK-500
	Transportation width, mm	2340	2950
	Working width, mm	4000	5000
	Shield height, mm	1100	1100
	Weight, kg	920	1030

Optional:

- Support plates
- Rise (grilles, 40 cm)
- Side lamps
- Lightening






Silage leveller ST

		ST-250	ST-300
	Working width, mm	2500	3000
	Height, mm	1000	1000
	Suspension system	cat. II	
	Weight, kg	295	320
	Demand of power	65/90	95/125

Optional:

- Rise (grilles, 40 cm)
- Side lamps
- Lightening

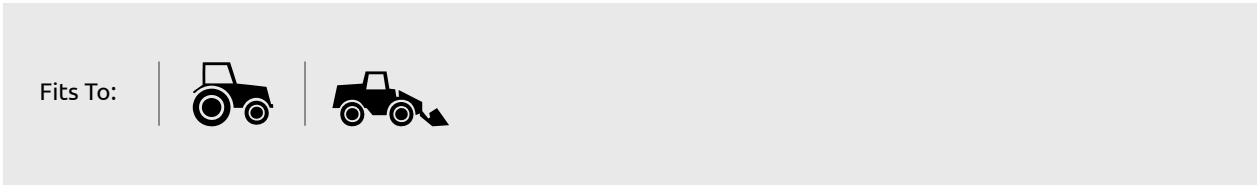

Silage fork FG

		FG-300
	Total width, mm	3056
	Total height, mm	1770
	Weight, kg	1563
	Capacity, m³	6,2

Tractor horsepower requirement – 160 hp rear linkage and 180 hp front linkage. Front linkage rating requirement is 5 tonnes.






Silograb SR

		SR-150	SR-170	SR-180	SR-200	SR-230	SR-250
↔	Width, mm	1500	1700	1800	2000	2300	2500
↕	Height, mm						800
⬇	Depth, mm						1030
⚖	Weight, kg	320	345	355	380	420	450
⤿	Capacity, m³	0,65	0,78	0,83	1,04	1,17	1,30

Fits To:

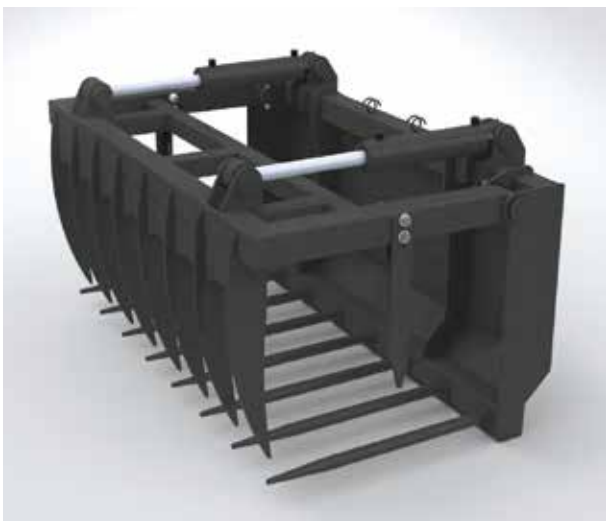

Silograb with sheet nails SRL

		SRL-150
↔	Width, mm	1500
↕	Height, mm	830
⬇	Depth, mm	1150
⚖	Weight, kg	360
⤿	Capacity, m³	0,65

Fits To:




Silo ripper SA

		SA-150	SA-190
↔	Width, mm	1590	1990
↗↘	Working width, mm	1500	1900
↕	Height, mm	930	930
⬇	Depth, mm	810	810
⚖	Weight, kg	560	740
⤿	Capacity, m³	0,89	1,13
⚙	Number of hydraulic cylinders, pcs	2	3
⚡	Recommended for tractors, HP	80-100	more than 100

Fits To:



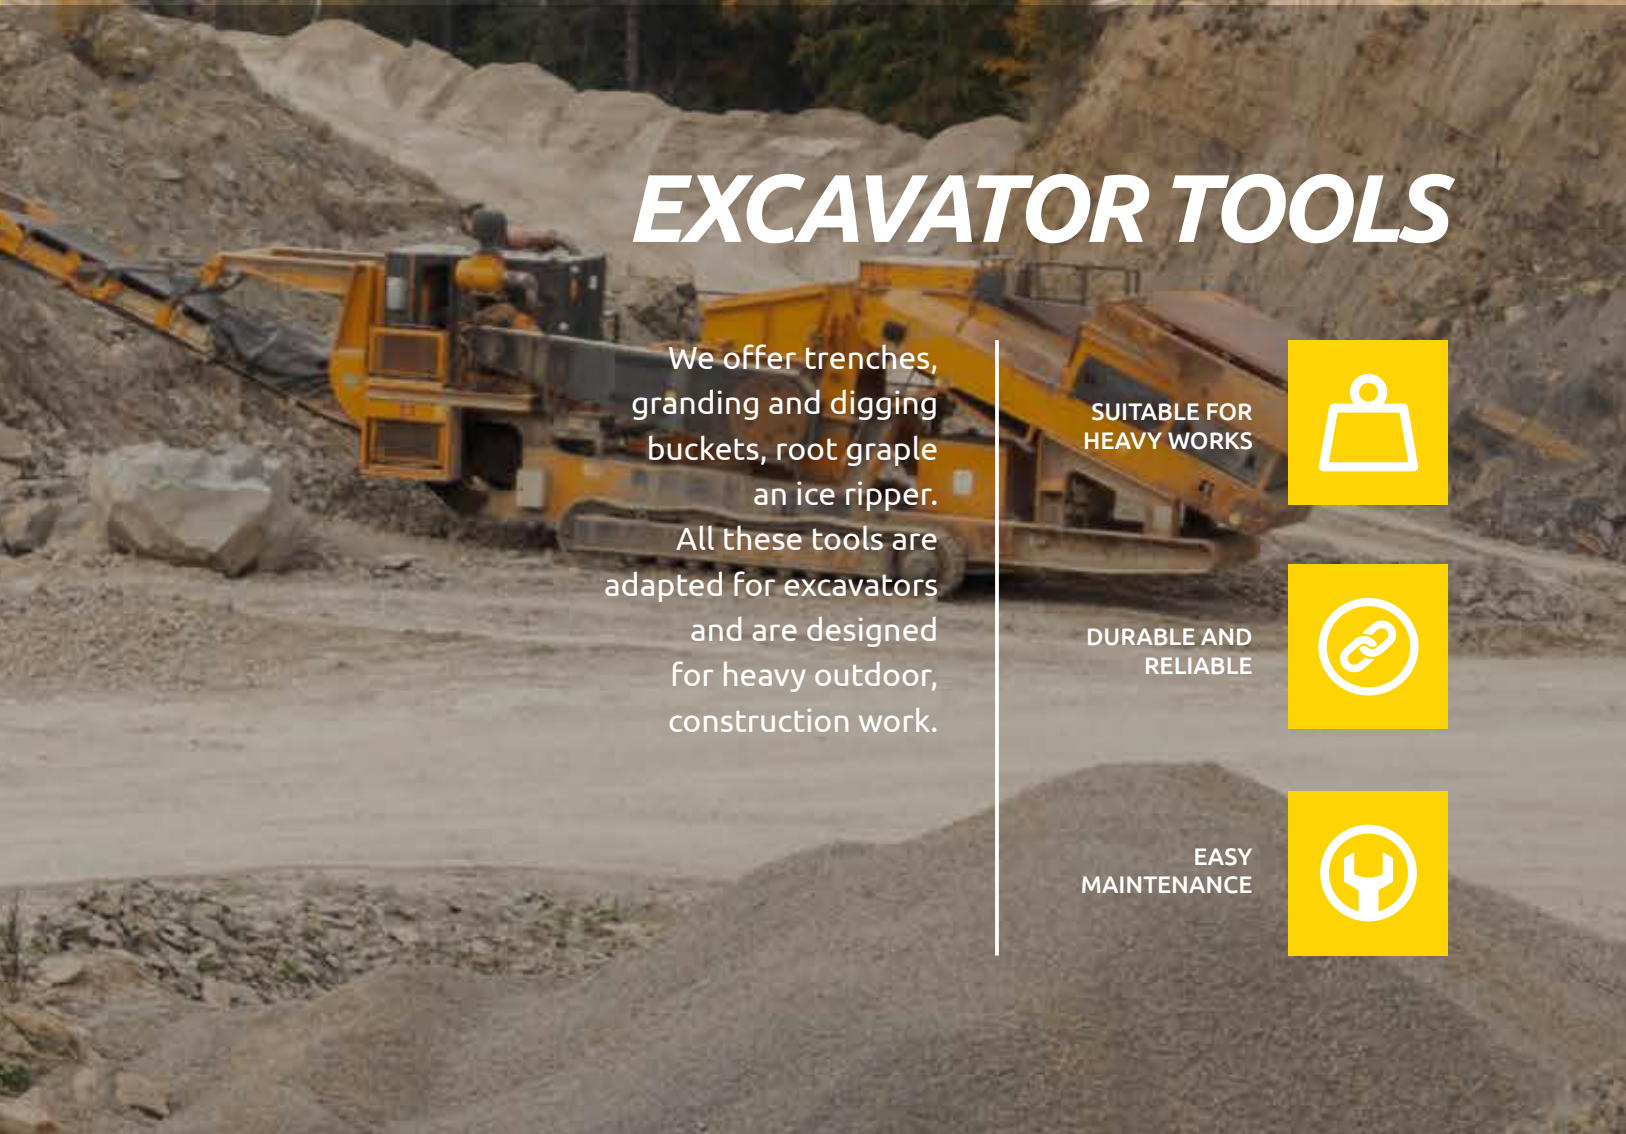

EXCAVATOR TOOLS

We offer trenches, grading and digging buckets, root grapple and an ice ripper. All these tools are adapted for excavators and are designed for heavy outdoor, construction work.

SUITABLE FOR
HEAVY WORKS



DURABLE AND
RELIABLE



EASY
MAINTENANCE





Trench bucket KOK

		KOK8 300-600	KOK13 300-670	KOK13 430-800
↔	Length, mm	576	670	811
↑ ↓	Height, mm	569	705	705
↔	Length 2, mm	300	300	430
kg	Weight, kg	115	254	294
↓	Depth, mm	1206	1450	1450
🔪	Knife	Hardox 450/25 mm		

Fits To:



Grading buckets LKR 5

		LKR5-1000	LKR5-1200	LKR5-1300
↔	Length, mm	1000	1200	1300
↑ ↓	Height, mm	629	629	629
↔	Length 2, mm	857	1057	1157
kg	Weight, kg	125	147	158
↓	Depth, mm	741	741	741
🔪	Knife	Hardox 500/16 mm		



Grading buckets LKR 8

		LKR8-1250	LKR8-1350	LKR8-1450
↔	Length, mm	1250	1350	1450
↑ ↓	Height, mm	664	664	664
↔	Length 2, mm	1092	1192	1292
kg	Weight, kg	234	251	268
↓	Depth, mm	1137	1137	1137
🔪	Knife	Hardox 500/20 mm		

Grading buckets LKR 10/LKR 18

		LKR10-1400	LKR10-1500	LKR18-1700
↔	Length, mm	1400	1500	1700
↑ ↓	Height, mm	818	818	1034
↔	Length 2, mm	1220	1320	1491
kg	Weight, kg	284	299	554
↓	Depth, mm	1033	1033	1246
🔪	Knife	Hardox 500/20 mm		Hardox 500/25 mm


Fits To:





Crowbars / Ice ripper RP

		RP5 S-40	RP6 S-45	RP8 S-45	RP13 S-60	RP18 S-60	RP22 S-70
← →	Crowbar length, mm	760	760	970	808	1022	1215
kg	Weight, kg	110	170	200	350	420	555

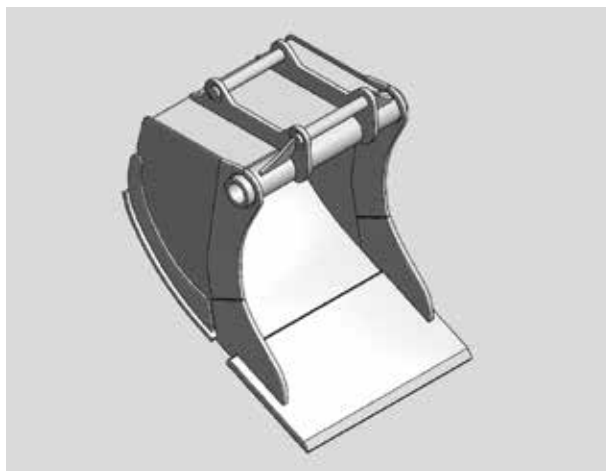

Fits To:



Digging bucket MGS

		MGS-1050	MGS-1100	MGS-1300	MGS-1470
← →	Width, mm	1050	1100	1300	1470
↑ ↓	Height, mm	1360	1520	1630	1752
kg	Weight, kg	560	860	1120	1500
U	Capacity, m ³	0,70	0,90	1,15	1,60
t	Recommended for excavators, t	12-16	16-20	20-25	25-32



Root grapple KH


		KH4-1200	KH5-1500	KH6-1600
	Tines, pcs	4	5	6
← →	Width, mm	1200	1500	1600
↑ ↓	Height, mm	1350	1350	1350
→ ←	Tines thickness, mm	35	35	35
←	Tines length, mm	1178	1178	1178
kg	Weight, kg	615	745	830

Fits To:



Asphalt cutter AL

		AL-10
↑ ↓	Cutting height, mm	100
kg	Weight, kg	162

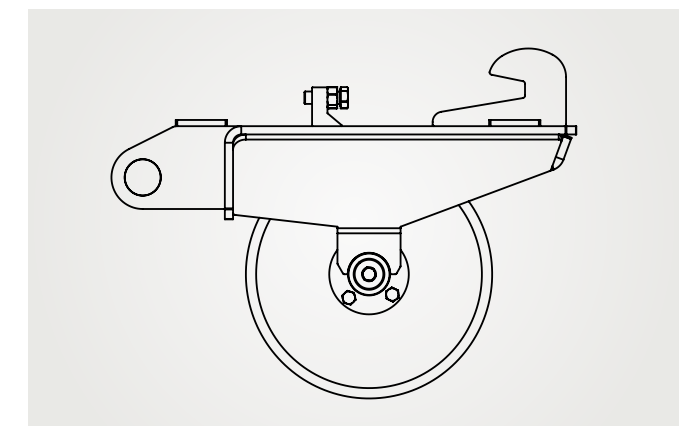

OTHER

We offer a high-quality and reliable mulchers and shredders, adapted for tractors and mini-tractors, and universal bale trailers.

RELIABLE AND
EFFICIENT



HIGH-QUALITY
PARTS



EASY
MAINTENANCE



Mulcher shredder MP

		MP-1050	MP-1250	MP-1450
↔	Total width, mm	1170	1370	1570
↔	Working width, mm	1050	1250	1450
⚖	Weight, kg	165	180	195
⚡	Recommended tractor power, HP	15-20	21-30	25-35
🔪	Blades, pcs	32	40	48
🔨	Hammers, pcs	16	20	24



Fits To:



Mulcher RCL

		RCL-1000	RCL-1250	RCL-1500
↔	Total width, mm	1090	1390	1590
↔	Working width, mm	1000	1250	1500
⚖	Weight, kg	210	250	288
⚡	Recommended tractor power, HP	17-26	26-35	36-45
🔪	Knives, pcs	2		
🔧	Mounting	3P I cat.		



Fits To:



Bale wagon RP

		RP-6000
↔	Lenght, mm	7455
↔	Width, mm	2360
∅	Bale diameter, mm	1500-1800
○	Bale quantity, pcs	3-4
⚖	Weight, kg	1000

Fits To:



FRONTLOADERS

Our frontloaders are very reliable, durable and accurate. They do not cover the visibility from the cab. Suitable for heavy and long-term work. Ideal for handling and transporting manure, silage, bulk materials, etc.

UNIVERSAL
USAGE



HIGH-QUALITY
PARTS



DURABLE AND
EFFICIENT





Frontloader FL-200 S-2/P

Lifting height – 2,0 m. Loading capacity – 520 kg.

		FL-200 S-2	FL-200 P
	Parallelogram	–	+
	Weight, kg	129	143
	Bucket width, mm	1200	1200
	Bucket capacity, m ³	0,16	0,16
	Lifting power at the ground (at 120 bar), kg	520	520
	Lifting power at 2 m height (at 120 bar), kg	400	400
	Bucket inverted angle	46°	46°
	Bucket tipping angle	64°	64°
	Power of tractor, hp	20-30	20-30

Possible models:

- Without 3rd function of hydraulics
- With 3rd function of hydraulics.

Optional attachments:

- Bucket K-120
- 4in1 bucket KH-130
- Pallet forks PS-95
- Grapple bucket KR-118L
- Bale forks RS-95

Fits To:




Frontloader FL-280

Lifting height – 2,8 m.

Loading capacity – 1000 kg.

		FL-280
	Weight, kg	290
	Lifting power, kg	1000
	Power of tractor, hp	50-60

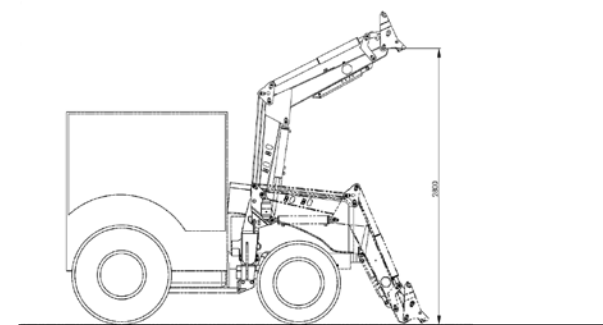

Fits To:




Frontloader FL-360

Lifting height – 3,6 m. Load capacity – 1860 kg.

Lifting forces daN (kg):

	PRESSURE	
	145 bar	180 bar
M_1	1100	1410
M_2	950	1190
N_1	1410	1800
N_2	1210	1530
Q_1	1710	2190
Q_2	1470	1860

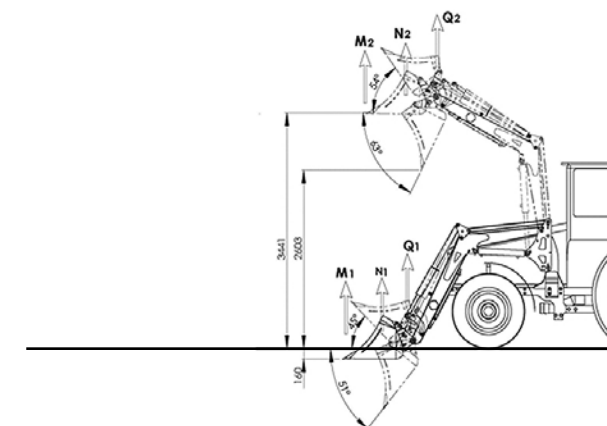

Fits To:






Frontloader FL-380

Lifting height – 3,8 m. Load capacity – 1860 kg.
Lifting forces daN (kg):

	PRESSURE	
	145 bar	180 bar
M ₁	1100	1410
M ₂	950	1190
N ₁	1410	1800
N ₂	1210	1530
Q ₁	1710	2190
Q ₂	1470	1860

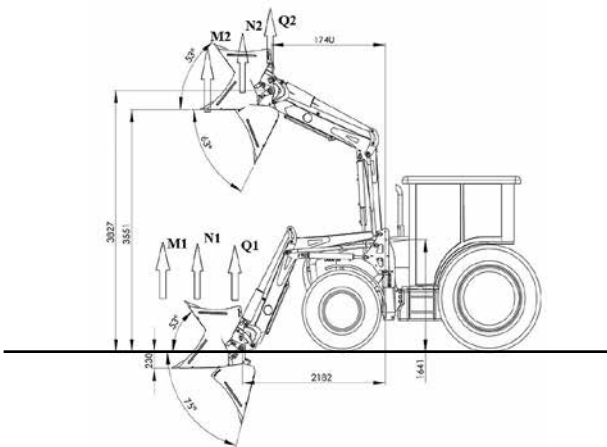


Fits To:



Frontloader FL-400

Lifting height – 4 m. Load capacity – 2100 kg.
Lifting forces daN (kg):

	PRESSURE	
	145 bar	180 bar
M ₁	1300	1670
M ₂	1050	1330
N ₁	1570	2020
N ₂	1310	1670
Q ₁	1900	2440
Q ₂	1650	2100

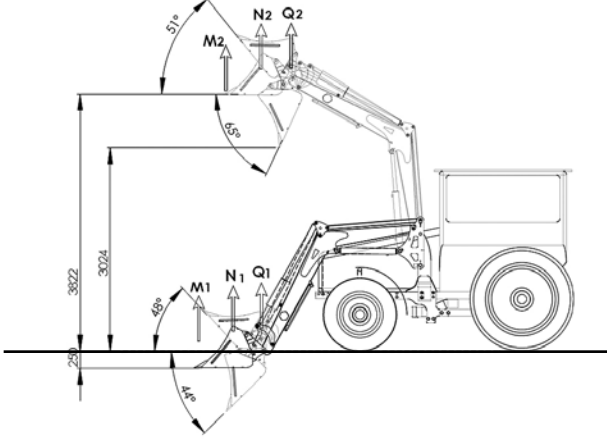

Fits To:



ORDERS

Orders must be confirmed either by email, fax or post within three working days. Orders will not be processed without official confirmation.

PRICES

The price list replaces and cancels all those issued before. All prices are exclusive of VAT and do not include carriage unless otherwise agreed.

SPECIFICATIONS

All capacities, sizes and weights in this brochure are approximate. UAB "V. Padagas ir Ko" reserves the right to alter specification without notice or consultation.

DELIVERY

The delivery time is set individually for every order. The Goods delivery shall be executed by means under the terms Ex Works, Plunge, unless otherwise agreed.

WARRANTY

The manufacturer guarantees the perfect functioning of Goods if it is operated in accordance with its manual and technical requirements. Throughout the warranty period observed shortcomings during the operation are remedied within 14 days or other agreed period of spreaders transmission warranty work conducting enterprise.

The warranty does not cover components and parts that wear out under normal operating conditions before the expiry of the warranty period. In addition, the warranty does not cover mechanical and other damages arising from the misuse and improper adjustment or maintenance carried out.



Provisions & Use of Work Equipment Regulations (2006).

UAB "V. Padagas ir Ko" produced machinery correspond to European directive 2006/42/EB.

A copy of our full terms and conditions of sale is available from our sales office.



	Telehandler		Tractor with front linkage
	Skid steer		Tractor
	Forklift		Mini Tractor
	Wheel loader		Excavator
	Tractor loader		Grader





www.padagas.eu